


**EMISSION TESTING REPORT**

NO REGISTER : 023 / EMISI - PLY / II / 2024  
 CONTRACT NO :  
 BUYER :  
 ITEM : HWPW-VC UF ( Falcata )  
 QUANTITY / SIZE : 11 pcs / 4,6 mm x 50 mm x 150 mm  
 TOTAL PLY : 5  
 TYPE OF GLUE : CARB  
 DESIKATOR TYPE : ISO 13130  
 DESCRIPTION/CONDITIONING OF SAMPLE :  
 TESTED FOR :  
 TESTING METHOD : JIS A1460 : 2021  
 PROD. DATE/SHIFT : 9 February 2024 / 1A  
 IN PRECONDITIONING : 10 February 2024  
 WEIGHING : 156,47-156,54 ( 0.04% ) & 160,50-160,59 ( 0.06% )  
 TEMPERATURE/HUMIDITY : 20.1 °C - 20.1 °C / 66 % - 68 %  
 IN CONDITIONING : 13 February 2024 ( 08.14 AM & 08.16 AM )  
 TEMPERATURE/HUMIDITY : 20.1 °C - 20.1 °C  
 TEST DATE : 14 February 2024 ( 08.16 AM & 08.18 AM )  
 WOOD SPECIES : Falcata

QCL : 1,104 mg/L  
 KURVA :  $Y = 1.4471 X + 0.0015$   
 ASTM D 6007:2014 (ppm) = JIS A 1460:2021 (mg/L)  
 22,080

ILLUSTRATION CUT OF SAMPLE

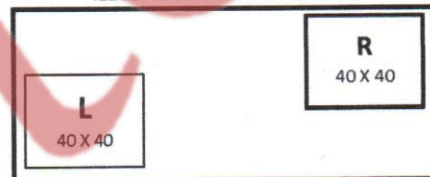

**Test Result:**

**Formaldehyde Emission**

Sample Code	Absorbance	Concentration (mg/l)	Corelation to ASTM D 6007:2014 (ppm)	Judgement
R	0,149	0,171	0,008 0,007	<b>PASS</b>
L	0,134	0,150		
Background :	0,026	0,04 mg/L	Perbedaan dua set semple 13 %	

Butuh, 14 Februari 2024

Checked by,

Junaidi Basvir  
QC Manager

Tested by,

Bambang S  
QC Employee

